

# Loading Dock Lights - Modular

## Modular Lights




### Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC
- Imported to TPI specifications.
- DKL-LED-37 is compliant with ROHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.

### Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)	LIST
04465602	DKL-INC	Incandescent	300	3,700	2,000	5	80
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6	119
04708602	DKL-LED	LED	12	960	50,000	7	273
04881302	DKL-LED-37	LED	37	2,373	>30,000	5	320
04843302	DKL-FL	Fluorescent	55	3,000	10,000	7	185

## Mounting Arms

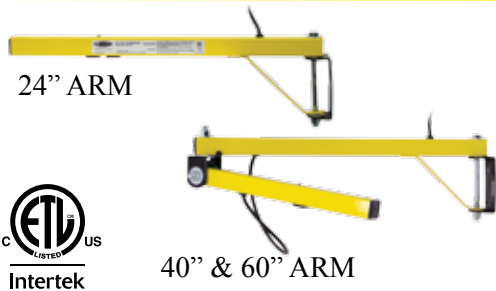

The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

### Features

- 1 1/2" square, 11 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Made in U.S.A.

### Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	WT. (LBS)	LIST
04465402	DKL-40VA-ARM	40"	2	18	125
04465502	DKL-60VA-ARM	60"	2	24	158
04465302	24-LDA	24"	1	11	98
04466102	40-LDA**	40"	3	18	169
04466202	60-LDA**	60"	3	24	196

\*\*Indicates heavy duty dock arms.

## Loading Dock Arm Fan



### Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.
- Imported to TPI specifications.

### Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	CFM			AMPS HIGH	WT. (LBS)	LIST
		HIGH	MED	LOW			
07971802	LDF-18-TE	1800	1500	1300	2.2	20	194

Note: Must be used with LDA (Heavy Duty) mounting arms.