

RFI Series

Fan-forced Heating


Quick response, high output heat — ideal for maintaining comfort in areas subject to cold drafts such as vestibules and stairwells, and automatic fan delay circulates residual heat even after unit cycles off

Flexible Installation

All models offer recessed or surface installation, ceiling or wall mounting

Practical Built-Ins

Includes built-in double pole thermostat, and convenient and subtle access door can be locked for tamperproof applications

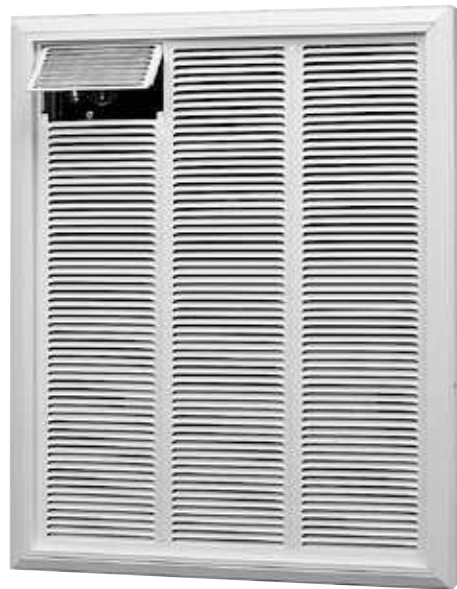

Complete Units (include white grille and built-in thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs/kg)
RFI815D31W	1500 / 1125	240 / 208	6.3 / 5.4	5118 / 3840	28 / 12.7
RFI820D31W	2000 / 1500	240 / 208	8.3 / 7.2	6824 / 5118	28 / 12.7
RFI830D31W	3000 / 2250	240 / 208	12.5 / 10.8	10236 / 7680	28 / 12.7
RFI840D21W	4000	208	19.2	13648	28 / 12.7
RFI840D31W	4000 / 3000	240 / 208	16.7 / 14.4	13648 / 10236	28 / 12.7
RFI848D31W	4800 / 3600	240 / 208	20 / 17.3	16378 / 12283	28 / 12.7

Accessories (sold separately)

Model	Description
RFP8DW	Surface mount box
RFITF	T-bar ceiling mount trim
RFIFPW	Front panel kit

Product Dimensions (WxHxD)

16-3/4" x 21-1/2" x 5-1/4"
42.5 cm x 54.6 cm x 13.3 cm



RFP8DW



RFIFPW



RFITF