

ASHC CONVECTOR



EFFICIENT HEATING

Our ASHC convector has pleasing rounded sides and beautiful modern lines. It is available with or without an ultra-accurate built-in electronic thermostat, so you can choose the level of control you want. This attractive unit is available in two colors and many voltages making it suitable for both commercial and residential applications. A real gem!

- **EXCELLENT VALUE**
- **TOTALLY QUIET**
- **BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL) WITH A BACKLIT SCREEN**
- **ADAPTS TO MULTIPLE MARKETS**
AVAILABLE IN: 120 V, 208 V, 240 V, 277 V AND 480 V

COLORS

- **standard:** white, soft white
- **Orora (optional):** refer to www.stelpro.com/en-US/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 20-gauge steel front
- the cabinet height improves the chimney effect
- bottom air intake and front air discharge
- 6 ft (2 m) 16 gage molded cable with 3-prong grounded, 120 V plug (ASHC1501P model)

CONTROL

- electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)

INSTALLATION


- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)

WARRANTY

- five years, *three years on electronic components

ELEMENTS

- two stainless steel tubular sheathed elements insulated with nylon sleeves to reduce expansion and contraction noises

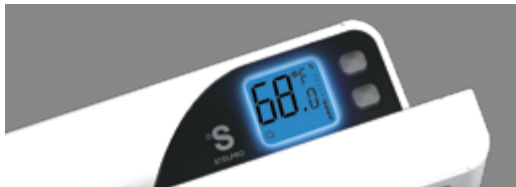

BUILT-IN ELECTRONIC THERMOSTAT AVAILABLE FOR THE 120 V TO 240 V MODELS



ALSO AVAILABLE

EASY INSTALLATION WITH 120 V PLUG

IDEAL FOR:

kitchen, living room, bedroom, office, basement, commercial space

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. **No returns accepted on optional-color products.** For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_SHC_US_220623

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT CODE	WITHOUT THERMOSTAT CODE	POWER		VOLTAGE	HEIGHT	LENGTH	WEIGHT
		WATTS	BTU/H	VOLTS	IN.	IN.	LB
ASHC0501	ASHC0501WC	500	1706	120	17 9/16	17 5/16	11.2
ASHC0508	ASHC0508WC	500	1706	208	17 9/16	17 5/16	11.2
ASHC0502	ASHC0502WC	500/375	1706	240/208	17 9/16	17 5/16	11.2
---	ASHC0507WC	500	1706	277	17 9/16	17 5/16	11.2
ASHC1001	ASHC1001WC	1000	3413	120	17 9/16	22 7/8	13.3
ASHC1008	ASHC1008WC	1000	3413	208	17 9/16	22 7/8	13.3
ASHC1002	ASHC1002WC	1000/750	3413	240/208	17 9/16	22 7/8	13.3
---	ASHC1007WC	1000	3413	277	17 9/16	22 7/8	13.3
---	ASHC1005WC	1000	3413	480	17 9/16	22 7/8	13.3
ASHC1501	ASHC1501WC	1500	5119	120	17 9/16	28 5/8	15.7
ASHC1508	ASHC1508WC	1500	5119	208	17 9/16	28 5/8	15.7
ASHC1502	ASHC1502WC	1500/1125	5119	240/208	17 9/16	28 5/8	15.7
---	ASHC1507WC	1500	5119	277	17 9/16	28 5/8	15.7
---	ASHC1505WC	1500	5119	480	17 9/16	28 5/8	15.7
ASHC2008	ASHC2008WC	2000	6825	208	17 9/16	35	18.9
ASHC2002	ASHC2002WC	2000/1500	6825	240/208	17 9/16	35	18.9
---	ASHC2007WC	2000	6825	277	17 9/16	35	18.9
---	ASHC2005WC	2000	6825	480	17 9/16	35	18.9
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)							
ASHC1501P*	---	1500	5119	120	17 9/16	28 5/8	15.7

Add W for white or SW for soft white (consult the optional colors chart or contact your Stelpro representative for all other colors).
Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.

* Available in white only
--- not available

ACCESSORIES

PRODUCT	DESCRIPTION
SHCRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
SHCRE156*	built-in electronic low voltage relay [6 A @ 600 V]
SHCRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Factory installed

TECHNICAL DRAWINGS

