


DRUM AND TOTE TANK/IBC IMMERSION HEATERS

NEW!



**PLUG
and
PLAY**

**IMPROVES THE FLOW OF
HIGHLY VISCOUS SOLUTIONS**

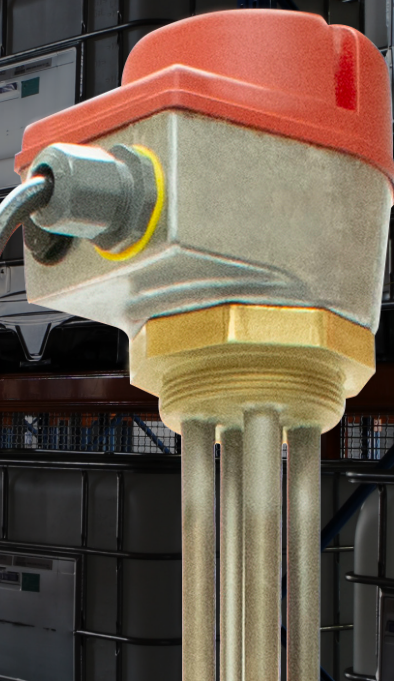

DRUM AND TOTE TANK/IBC IMMERSION HEATERS

- ▶ **Faster heat-up rates compared to standard wrap-around heaters***
- ▶ **Easy installation-screws directly into top of tank/drum**
- ▶ **Can be used on poly or metal tanks/drums**
- ▶ **Grounded for safety**
- ▶ **Food-safe construction**
- ▶ **Ideal for non-acidic materials**

*When paired with an insulator

Specifications:

Voltage: 120 VAC or 240 VAC

Flange Connection Type: 2 in (51 mm) NPS Bushing

Temperature Range: up to 167°F (75°C)

Temperature Display: 3-digit 0.4 in (11.1 mm) high LED

Heater Construction: Incoloy 840

Controller Ingress Protection Rating: IP55

Accuracy: 0.2°F (0.1°C)

Alarm: High-limit visual at 180°F (82°C)

Power Cord: 10 ft (3 m) long

120V includes standard 3-prong plug (NEMA 5-15)

240V includes bare wire leads

NOTE: This should not be used with most acidic or caustic liquids. Please refer to the ATI 840 data sheet and chemical compatibility to determine suitability.

NEW!



With Digital Display



Ordering Information:

Drum Immersion Heaters

Voltage	Temperature Display Units	Wattage	Length in (mm)	Heated Length in (mm)	Drum Size Gal (l)	Drum Diameter in (mm)	Drum Height in (mm)	Part No.
120	°F	1000	32 (813)	12 (305)	55 (208)	22 (559)	36 (914)	DHI120
240	°F	1000	32 (813)	12 (305)	55 (208)	22 (559)	36 (914)	DHI240
240	°C	1000	32 (813)	12 (305)	55 (208)	22 (559)	36 (914)	DHI240-C

Tote Tank/IBC Immersion Heaters

Voltage	Temperature Display Units	Wattage	Length in (mm)	Heated Length in (mm)	Part No.
120	°F	1500	34 (864)	18 (457)	TTI120
240	°F	1500	34 (864)	18 (457)	TTI240
240	°C	1500	34 (864)	18 (457)	TTI240C

BriskHeat offers a full line of immersion heaters, standard and custom options available. Contact your BriskHeat representative to learn more.

